

PACKING A,B,C Grade



----- Your imagination, our creation -----

Packing Plywood is a type of plywood used to pack goods and serve the transportation of products, and especially when businesses have a need to transport high-value goods, fresh fruits, fragile items

A/B grade is a good choice for low-cost purposes.

B/C grade is the most cost-effective plywood for duty that's not require in terms of quality as well as surface (pallets, packing goods)



Brand

WOOD LINE PACKAGING

Wood materials

Vietnam hardwood from legally sourced plantation wood

Standard Sizes

1,220 x 2,440 mm

Standard Thicknesses

6mm, 8mm, 12mm, 14mm, 17mm
(or as buyer's request)


Thickness tolerance: +/- 0.5mm

Face veneer

- Grade A/B: Bintangor, Okoume, Pine, Styrax
- Grade B/C: Bintangor, Styrax, Ormosia

Core veneer

Vietnam wood: Acacia, Eucalyptus, Styrax

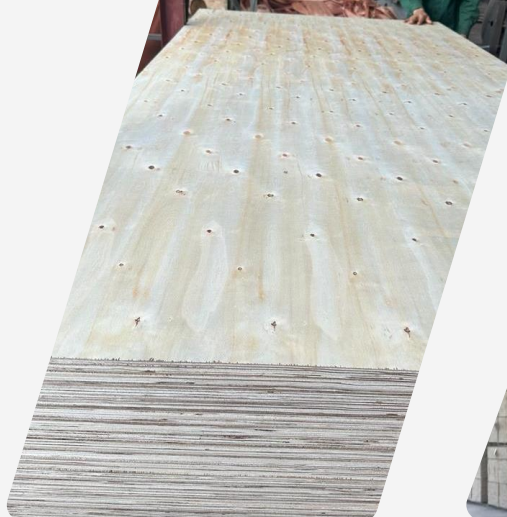

Glue

MR - moisture resistance
E2 standard formaldehyde emission
Ensures good adhesion, and the rate of delamination is almost zero

Moisture Content

<15% (Less than fifteen percent)

Origin

Made in Vietnam

Density

580 - 680 kg/m³

Packaging

Panels are packed in crates with metal/plastic straps, suitable for loading/unloading by forklifts

Thickness	Crates per container	Cubic meter per container	Maximum net weight
6 mm	16 - 18	45 - 48 cubic meters	28.50 tons
8 mm	16 - 18		
12 mm	16 - 18		
14 mm	16 - 18		
17 mm	16 - 18		



----- Your imagination, our creation -----



WOOD LINE

Head Office
2nd floor, Kinh Do Building, 292 Tay
Son Street, Dong Da District, Hanoi
City, Vietnam

www.woodline.vn | sales@woodline.vn
| (+84) 32 984 4894