

ANTI-SLIP PLYWOOD

# WIREMESH PLY



WOOD LINE

----- Your imagination, our creation -----

WOODLINE WIREMESH is a hardwood plywood panel covered with an anti-slip phenolic film. It has an anti-slip mesh pattern on one side and a smooth film face finish on the other side. The anti-slip finish is ideal for demanding applications in the transport flooring, construction and events industries.

Wiremesh Ply is also easy to clean and resistant to most commonly used chemicals



**EN 13986:2004+A1:2015**

Wood-based panels for use in construction

## Brand

WOOD LINE FORMWORK

## Wood materials

Vietnam hardwood from legally sourced plantation wood

## Key benefit

- Main application areas include: flooring and panelling of trailers and commercial vehicles, container flooring, scene and tent flooring, scaffolding and warehousing shelving
- High anti-slip index
- High durability and crack resistance
- Made from responsibly sourced wood in Vietnam

## Standard Sizes

1,220 x 2,440 mm

Size tolerance (width/ length):  
+/- 1.0 mm per meter.


Squareness tolerance:  
+/- 1.0 mm per meter length of diagona

## Standard Thicknesses

12mm, 18mm, 21mm

Thickness tolerance: ref. EN 375:2000

*Custom sizes are available upon request*

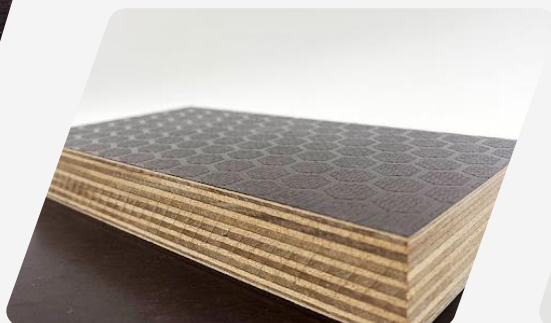

**Bonding & Formaldehyde Emission**

Class 3 | EN 314-2  
E2, E1, E0 | EN 717-1

**Edge Color**

Edges of WIREMESH PLY panels are bare core or painted Black, Red, Brown, as buyer’s request

**Packaging**

Panels are packed in crates with metal/plastic straps, suitable for loading/unloading by forklifts

**Other Conformities & Compliances**

In case FSC certificate or others are required, contact the sales team for further information

**Warnings**

This product will generate wood dust from sawing, sanding, or shaping. Material safety data sheets are available upon request

**Straightness and squareness deviation**

Deviation	
Straightness	± 0,1% or ± 1mm/m
Squareness	± 0,1% or ± 1mm/m

Thickness	Crates per container	Cubic meter per container	Maximum net weight
12 mm	16 - 18	45 - 48 cubic meters	28.50 tons
18 mm	16 - 18		
21 mm	16 - 18		

**Coating**

Film type	Phenolic
Thickness	145 / 167 / 220 g/m²
Colour	Black, black brown
Taber Abraser	400 / 480 / 600 (no. of cycles)
Rolling Test	1800 ± 35%
Anti-slip index	R10
Pattern	Hexagon, Crown, Wire Mesh



**WOOD LINE**

Head Office  
6<sup>th</sup> Floor, Sky City Tower, 88 Lang Ha,  
Dong Da, Hanoi, Vietnam

**www.woodline.vn | sales@woodline.vn**  
**| (+84) 32 984 4894**